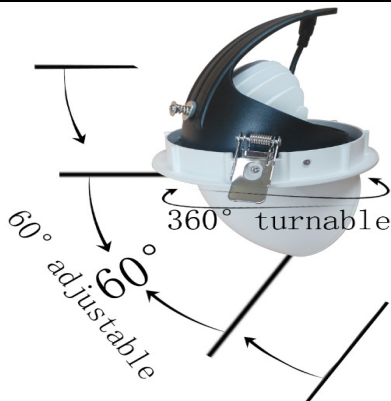


Product Specifications

Part No	DL691W		
Light Type	LED, Recessed mounting		
Control Gear	External driver, PF>0.90		
Dimension	9W - $\phi 90 \times \phi 75 \times H75MM$ 15W - $\phi 114 \times \phi 100 \times H80MM$ 30W - $\phi 138 \times \phi 125 \times H120MM$ 40W - $\phi 165 \times \phi 150 \times H145MM$ 50W - $\phi 190 \times \phi 175 \times H165MM$		
Cut-out size	75-175MM		

Technical Characteristic

Color temperature	3000-3250K (WW)	4000-4250K (CW)	6000-6500K (DL)
CRI	> 90		
Lumen (LM)	100-110LM/W		
System Power	9-50W		
Cast Angle	24°		
Input Voltage	AC100-260V 50/60Hz		
Dimming	Optional		

Materials

LED Brand	Bridgelux
Operating hours	50,000 Hr
Housing	Aluminium die cast
Housing color	White